

| MODEL | VOLTAJ (V) | GÜÇ (kW) | DEBİ (m³/h) | SES SEVİYESİ (dB(A)) |
|------------------|------------|----------|-------------|----------------------|
| CAXIDIK 400-5-25 | 380 | 0,37 | 2.850 | 66 |
| CAXIDIK 450-5-25 | 380 | 0,55 | 3.800 | 69 |
| CAXIDIK 500-5-25 | 380 | 0,55 | 4.750 | 72 |
| CAXIDIK 560-5-25 | 380 | 0,75 | 7125 | 75 |
| CAXIDIK 630-5-30 | 380 | 1,10 | 11.400 | 80 |
| CAXIDIK 710-5-30 | 380 | 1,50 | 16.150 | 83 |
| CAXIDIK 800-5-30 | 380 | 2,20 | 21.850 | 85 |
| CAXIDIK 800-5-35 | 380 | 3,00 | 26.600 | 89 |


Değerler 0 Pa içindir

OPSİYONLAR

- İstenilen renkte elektrostatik toz boya
- İstenilen debi ve basınçta özel üretim
- 5-8-12-16 Kanat Sayısı
- Alüminyum veya Plastik Kanat Seçeneği

| MODEL | A (mm) | B (mm) | C (mm) |
|-------------|--------|--------|--------|
| CAXIDIK 400 | 500 | 800 | 600 |
| CAXIDIK 450 | 550 | 850 | 600 |
| CAXIDIK 500 | 600 | 900 | 630 |
| CAXIDIK 560 | 660 | 960 | 630 |
| CAXIDIK 630 | 730 | 1030 | 700 |
| CAXIDIK 710 | 810 | 1110 | 700 |
| CAXIDIK 800 | 900 | 1200 | 750 |

N: Delik Sayısı

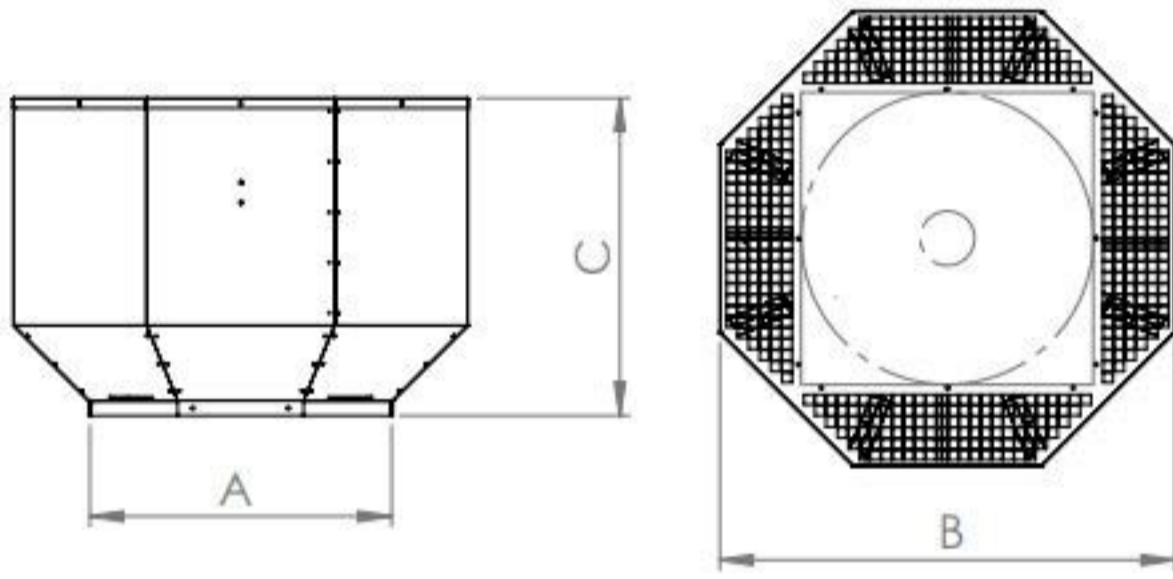


CAXIDIK FAN OPSİYONLARI




CAXIDIK FAN ÇALIŞMA EĞRİLERİ


CAXIDIK 400-5-25

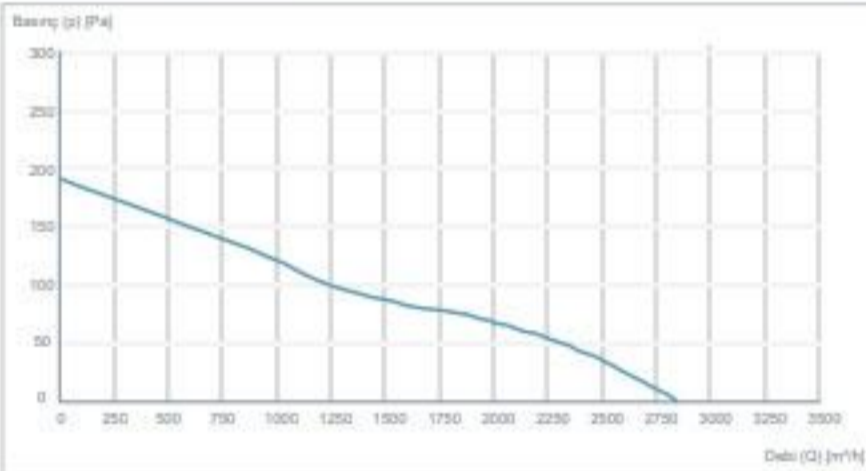


CAXIDIK 450-5-25

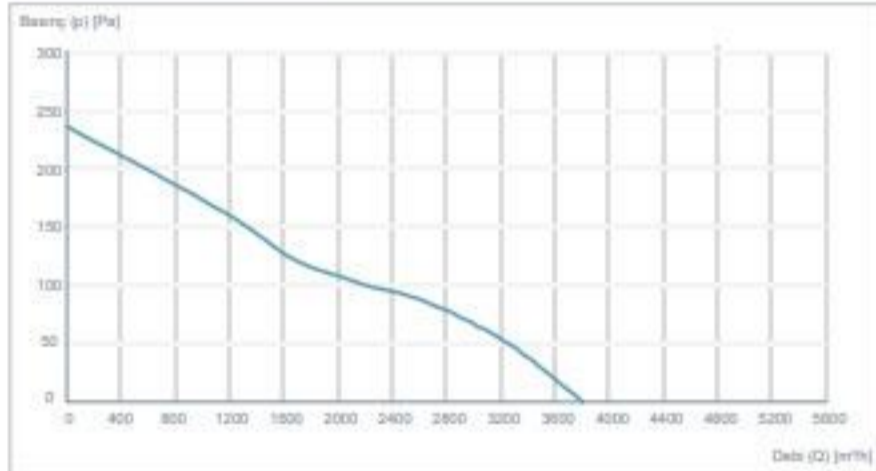


CAXIDIK 500-5-25

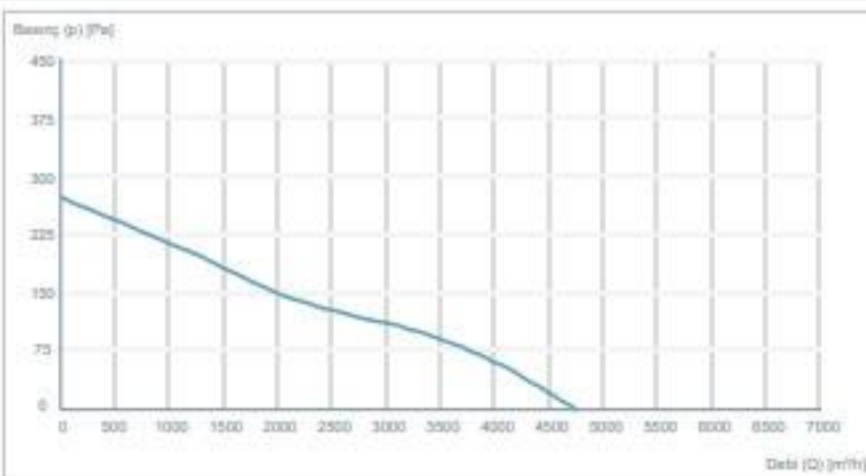


CAXIDIK 560-5-25

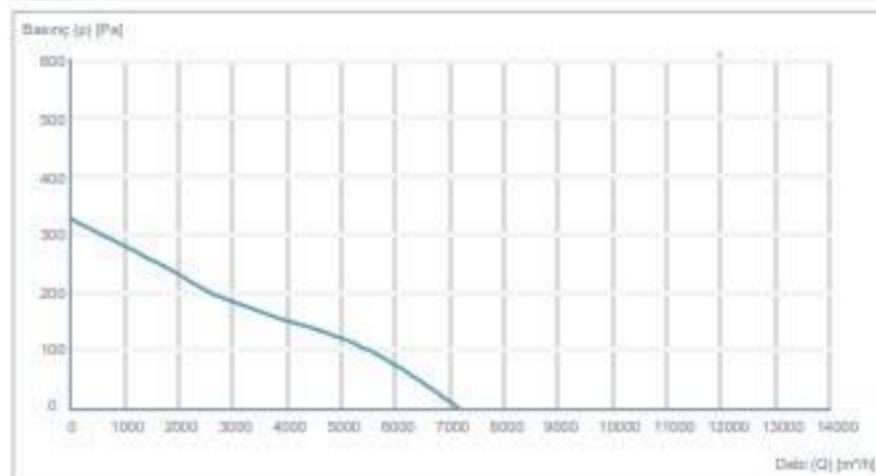


CAXIDIK 630-5-30

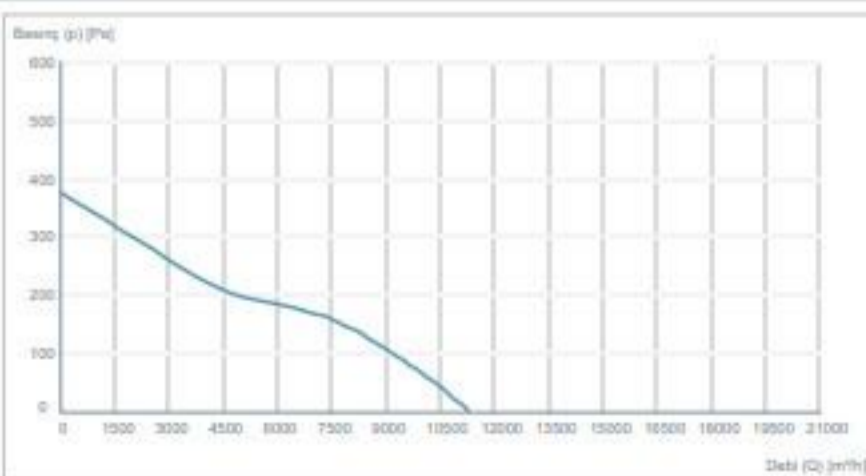

CAXIDIK 710-5-30

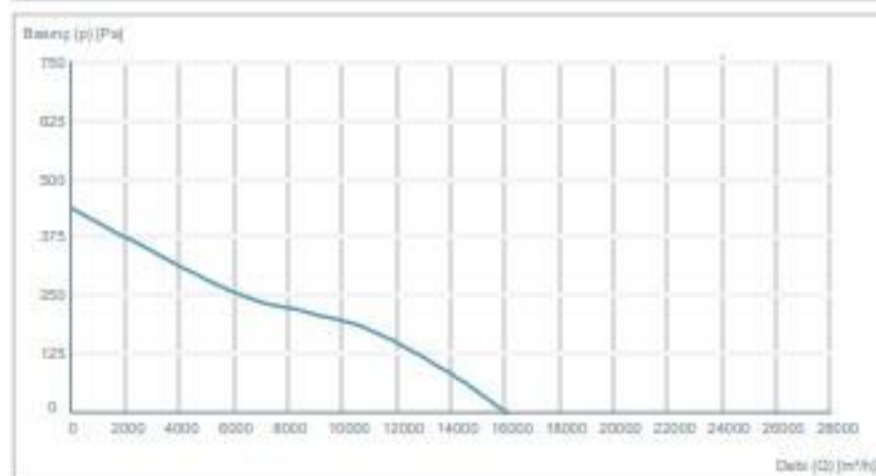

CAXIDIK 800-5-30

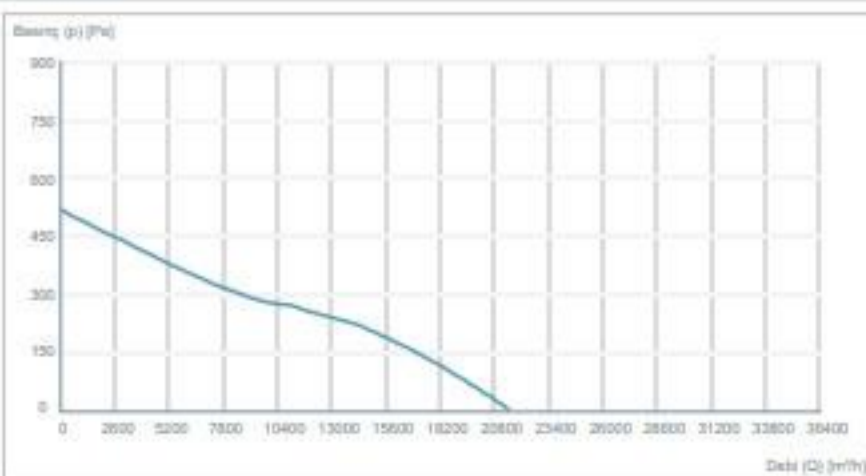

CAXIDIK 800-5-35

